
Floor Console Page 1 of 5

Published: Jan 23, 2007


## **Floor Console (76.25.01)**

## Removal

- 1 . Remove the floor console upper panel. For additional information, refer to Floor Console Upper Panel (76.25.11)
- 2. Remove the cigar lighter assembly closing panel.
  - Release the 4 clips.



- 3 . Release the floor console wiring harness and disconnect the 5 electrical connectors.
- 4. Remove the floor console.
  - Move the front seats fully forwards.
  - Remove both rear Torx bolt covers.
  - Remove the 4 Torx bolts.

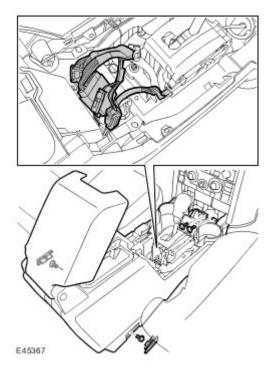


5 . **NOTE:** 

Do not disassemble further if the component is removed for access only.


Floor Console Page 2 of 5

Remove the floor console lid.

- Open the lid.
- Remove the 2 Torx bolts.
- Remove the 2 covers.




- 6 . Remove the floor console stowage compartment.
  - Remove the 2 Torx screws.
  - Release the 5 clips.



- $\ensuremath{\mathbf{7}}$  . Remove the auxiliary socket panel.
  - Release the 2 clips.
  - Disconnect the 2 electrical connectors.


Floor Console Page 3 of 5

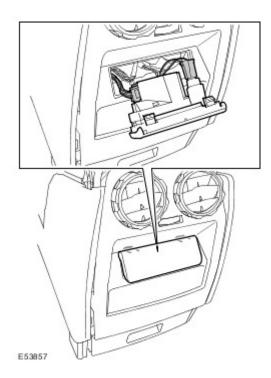

 $\boldsymbol{8}$  . Remove the floor console register trim panel.

Release the 6 clips.


Remove the screw.




 $\boldsymbol{9}$  . Remove the cup holder.


Release the 2 clips.

Floor Console Page 4 of 5

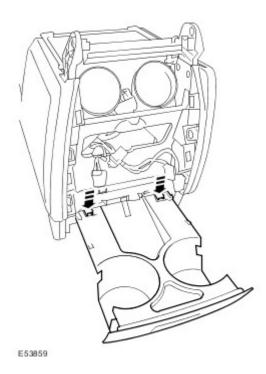

10 . Remove the wiring harness.





## Installation

- 1 . Install the wiring harness.
  - Secure the clips.
- 2. Install the cup holder.
  - Secure with the clips.
- 3 . Install the floor console register trim panel.
  - Secure with the clips.
  - Install the screw.
- 4 . Install the auxiliary socket panel.

Floor Console Page 5 of 5

- Connect the electrical connectors.
- Secure with the clips.
- 5. Install the floor console stowage compartment.
  - Secure the clips.
  - Tighten the Torx screws.
- 6. Install the floor console lid.
  - Install the covers.
  - Tighten the Torx bolts to 3 Nm (2 lb.ft).
- 7. Install the floor console.
  - Tighten the Torx bolts to 10 Nm (7 lb.ft).
  - Install the Torx bolt covers.
  - Connect and secure the electrical connectors.
- 8 . Install the cigar lighter assembly closing panel.
  - Secure with the clips.
- 9 . Install the floor console upper panel. For additional information, refer to Floor Console Upper Panel (76.25.11)